- Sleek Plus T4 fluorescent fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for vertical or horizontal mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T4 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 2-WIRE COMPONENTS on page???.








# email: sales@naturallighting.com FAX: 281.559.4949

Model	Dimension	Max Watt	Lumens*	Finish
SP4-6**	9-3/8"L x 3/4"W x 1-1/4"H	6W	480	W - White
SP4-8	13-1/2"L x 3/4"W x 1-1/4"H	8W	600	W - White
SP4-12	17-1/2″L x 3/4"W x 1-1/4″H	12W	800	W - White
SP4-16	19-1/2"L x 3/4"W x 1-1/4"H	16W	1000	W - White
SP4-20	21"L x 3/4"W x 1-1/4"H	20W	1350	W - White
SP4-24	34-1/2"L x 3/4"W x 1-1/4"H	24W	2150	W - White
SP4-28	46-1/4"L x 3/4"W x 1-1/4"H	28W	2900	W - White

Lam	p Options		
30	3000K	ВК	Black
41	4100K	BU	Blue
64	6400K	GN	Green
		RD	Red

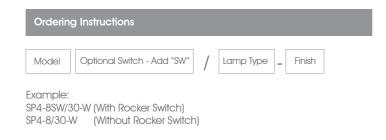


\*The information on LUMENS is based on cool white lamps.

- Sleek Plus T5 fluorescent fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for vertical or horizontal mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant start, no flickering, silent Electronic Ballast rated AC120v 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 2-WIRE COMPONENTS on page???.







NATURALLIGHTING.COM www.naturallighting.com 888.900.6830 email: sales@naturallighting.com FAX: 281.559.4949

Model	Dimension	Max Watt	Lumens*	Finish
SP5-14	22-3/4″L x 3/4"W x 1-1/2"H	14W	1350	W - White
SP5-21	34-1/2"L x 3/4"Wx1-1/2"H	21W	2150	W - White
SP5-28	46-1/2″L x 3/4"W x 1-1/2″H	28W	2900	W - White

Lam	o Options		
30	3000K	ВК	Black
35	3500K	BU	Blue
41	4100K	GN	Green
50	5000K	RD	Red
64	6400K		

#### Ordering Instructions


Model Optional Switch - Add "SW"

Lamp Type 📮 Finish


Example: SP5-14SW/30-W (With Rocker Switch) SP5-14/30-W (Without Rocker Switch)

\*The information on LUMENS is based on cool white lamps.

- Sleek Plus T4 fluorescent fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for vertical or horizontal mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T4 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-WIRE COMPONENTS on page???.

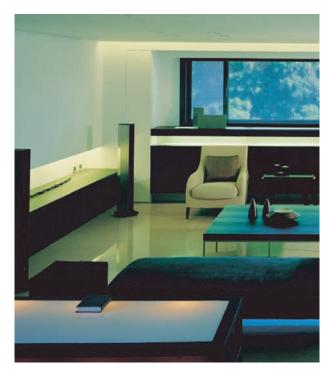






# NATURALLIGHTING.COM www.naturallighting.com 888.900.6830 email: sales@naturallighting.com FAX: 281.559.4949

Model	Dimension	Max Watt	Lumens*	Finish
SG4-6**	9-3/8″L x 3/4"W x 1-1/4″H	6W	480	W - White
SG4-8	13-1/2″L x 3/4"W x 1-1/4″H	8W	600	W - White
SG4-12	17-1/2″L x 3/4"W x 1-1/4″H	12W	800	W - White
SG4-16	19-1/2"L x 3/4"W x 1-1/4"H	16W	1000	W - White
SG4-20	21"L x 3/4"W x 1-1/4"H	20W	1350	W - White
SG4-22***	29"L x 3/4"W x 1-1/4"H	22W	1850	W - White
SG4-24	34-1/2"L x 3/4"W x 1-1/4"H	24W	2150	W - White
SG4-28	46-1/4"L x 3/4"W x 1-1/4"H	28W	2900	W - White



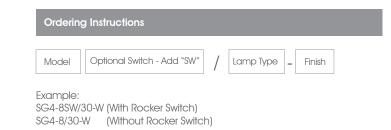

\*The information on LUMENS is based on cool white lamps.

\*\*The 6W fixture is not available with a Rocker Switch. A cord and plug with switch (SP-PCSW) may be ordered separately - See page?


\*\*\* SG4-22 only offered with 4100K lamp.

- Sleek Plus T4 fluorescent fixtures feature an adjustable light shield that provides 360° rotation to direct light where necessary.
- Fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for horizontal or vertical mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with silver or white enamel painted finish.
- The fixture features a built-in instant-start, no flickering, silent electronic ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T4 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-WIRE COMPONENTS on page???.






Light shield rotates 360° to direct light where necessary.



Model	Dimension	Max Watt	Lumens*	Finish
SG4A-6**	9-1/2"L x 7/8"W x 1-3/4"H	6W	480	S - Silver, W - White
SG4A-8	13-3/4"L x 7/8"W x 1-3/4"H	8W	600	S - Silver, W - White
SG4A-12	17-3/4″L x 7/8"W x 1-3/4″H	12W	800	S - Silver, W - White
SG4A-16	19-1/2"L x 7/8"W x 1-3/4"H	16W	1000	S - Silver, W - White
SG4A-20	21-1/4″L x 7/8"W x 1-3/4″H	20W	1350	S - Silver, W - White
SG4A-22	29-1/4″L x 7/8"W x 1-3/4″H	22W	1850	S - Silver, W - White
SG4A-24	34-5/8"L x 7/8"W x 1-3/4"H	24W	2150	S - Silver, W - White
SG4A-28	46-1/2"L x 7/8"W x 1-3/4"H	28W	2900	S - Silver, W - White

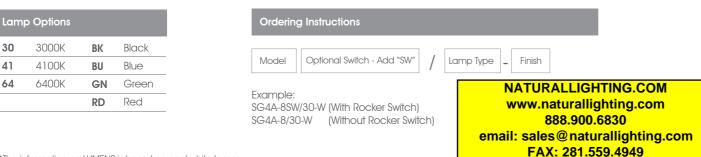

\*The information on LUMENS is based on cool white lamps.

30


41

64

- Sleek Plus T5 fluorescent fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for vertical or horizontal mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant start, no flickering, silent Electronic Ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-WIRE COMPONENTS on page???.









NAT	URALLIGHTING.COM
www	v.naturallighting.com
	888.900.6830
email: sa	ales@naturallighting.com
	FAX: 281.559.4949

Model	Dimension	Max Watt	Lumens*	Finish
\$G5-6**	9-3/8"L x 3/4"W x 1-1/2"H	6W	480	W - White
SG5-8	12-3/8″L x 3/4"Wx1-1/2″H	8W	600	W - White
SG5-14	22-3/4"L x 3/4"W x 1-1/2"H	14W	1350	W - White
SG5-21	34-1/2″L x 3/4"W x 1-1/2″H	21W	2150	W - White
SG5-28	46-1/4"L x 3/4``W x 1-1/2"H	28W	2900	W - White
SG5-35	58″L x 3/4"W x 1-1/2″H	35W	3650	W - White



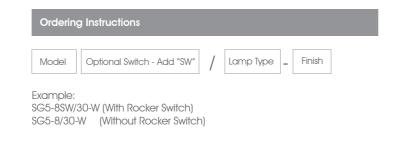


\*The information on LUMENS is based on cool white lamps.

- Sleek Plus T5 fluorescent fixtures feature an adjustable light shield that provides 360° rotation to direct light where necessary.
- Fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for horizontal or vertical mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white or silver enamel painted finish.
- The fixture features a built-in instant start, no flickering, silent Electronic Ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek plus T5 are linkable up to 10 units, max 350 watts.
- Compatible with 3-WIRE COMPONENTS on page???.





Light shield rotates 360° to direct light where necessary.



Model	Dimension	Max Watt	Lumens*	Finish
SG5A-6**	9-1/2″L x 7/8"W x 1-3/4″H	6W	480	S -Silver, W - White
SG5A-8	12-1/2"L x 7/8"W x 1-3/4"H	8W	600	S -Silver, W - White
SG5A-14	22-7/8"L x 7/8"W x 1-3/4"H	14W	1350	S -Silver, W - White
SG5A-21	34-5/8"L x 7/8"W x 1-3/4"H	21W	2150	S -Silver, W - White
SG5A-28	46-1/2"L x 7/8"W x 1-3/4"H	28W	2900	S -Silver, W - White
SG5A-35	58-1/4″L x 7/8"W x 1-3/4″H	35W	3650	S -Silver, W - White

	Ordering Instructions
Black	
Blue	Model Optional Switch - Add "SW" / Lamp Type _ Finish
Green	NATURALLIGHTING.COM
Red	Example: SG5A-8SW/30-W (With Rocker Switch) www.naturallighting.com
	SG5A-8/30-W (Without Rocker Switch) 888.900.6830
	email: sales@naturallighting.com
is based on cool whit	e lamps. FAX: 281.559.4949

\*The information on LUMENS is based on cool white lamps.

BK B

BU

GN

RD

Lamp Options

3000K

3500K

4100K

5000K

6400K

30

35


41

50

64

- Sleek Plus T5 fluorescent fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for vertical or horizontal mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant start, no flickering, silent Electronic Ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The High Output T5 lamps (included with fixtures) offer increased light output up to 70% more lumens than standard T5 lamps.
- High Output T5 lamps are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-WIRE COMPONENTS on page???.





3/4"		3/4"
<u> </u>		

NATURALLIGHTING.COM
www.naturallighting.com
888.900.6830
email: sales@naturallighting.com
FAX: 281.559.4949

Finish

Model	Dimension	Max Watt	Lumens*	Finish
SG5HO-24	22-5/8"L x 7/8"W x 1-3/4"H	24W	2000	W - White
\$G5HO-39	34-3/8"L x 7/8"W x 1-3/4"H	39W	3500	W - White
SG5HO-54	46-1/4"L x 7/8"W x 1-3/4"H	54W	5000	W - White

Lamp Options				
30	3000K	ВК	Black	
35	3500K	BU	Blue	
41	4100K	GN	Green	
50	5000K	RD	Red	
64	6400K			

### Ordering Instructions

Model Optional Switch - Add "SW" / Lamp Type

#### Example:

SG5HO-24SW/30-W (With Rocker Switch) SG5HO-24/30-W (Without Rocker Switch)


\*The information on LUMENS is based on cool white lamps.

- Sleek Plus T5 fluorescent fixtures feature an adjustable light shield that provides 360° rotation to direct light where necessary.
- Fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for horizontal or vertical mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white or silver enamel painted finish.
- The fixture features a built-in instant start, no flickering, silent Electronic Ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The High Output T5 lamps (included with fixtures) offer increased light output up to 70% more lumens than standard T5 lamps.
- High Output T5 lamps are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-WIRE COMPONENTS on page???.





Light shield rotates 360° to direct light where necessary.



Model	Dimension	Max Watt	Lumens*	Finish
SG5AHO-24	22-7/8"L x 7/8"W x 1-7/8"H	24W	2000	S - Silver, W - White
SG5AHO-39	34-5/8"L x 7/8"W x 1-7/8"H	39W	3500	S - Silver, W - White
SG5AHO-54	46-1/2"L x 7/8"W x 1-7/8"H	54W	5000	S - Silver, W - White

Model

Lamp Options				
30	3000K	BK	Black	
35	3500K	BU	Blue	
41	4100K	GN	Green	
50	5000K	RD	Red	
64	6400K			

Ordering Instructions

Optional Switch - Add "SW"

Add "SW" / Lamp Type

Finish

/

Example: SG5AHO-24SW/30-S (With Rocker Switch) SG5AHO-24/30-S (Without Rocker Switch)

\*The information on LUMENS is based on cool white lamps.

NATURALLIGHTING.COM www.naturallighting.com 888.900.6830 email: sales@naturallighting.com FAX: 281.559.4949

- Sleek Plus T5 fluorescent fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for vertical or horizontal mount; and ribbed acrylic lamp covers.
- Suitable for Low Voltage applications.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant start, no flickering, silent Electronic Ballast rated AC120V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable, max 70 Watts.
- Compatible with 3-WIRE COMPONENTS on page???.



Model	Dimension	Max Watt	Lumens*	Finish
SG5LV-14	22-5/8"L x 7/8"W x 1-3/4"H	14W	1350	W - White
SG5LV-21	34-3/8"L x 7/8"W x 1-3/4"H	21W	2150	W - White
SG5LV-28	46-1/4"L x 7/8"W x 1-3/4"H	28W	2900	W - White

Lamp Options				
30	3000K	ВК	Black	
35	3500K	BU	Blue	
41	4100K	GN	Green	
50	5000K	RD	Red	
64	6400K			

## Ordering Instructions



\*The information on LUMENS is based on cool white lamps.

\*\*To order fixtures with Rocker Switches, add suffix SW. For example, the 14w 3-wire fixture 3000K lamp with a Rocker Switch will be SG5ALV-14SW/30. Price is additional.

# SLEEK PLUS • ADJUSTABLE 24V LOW VOLTAGE T5 • 3-WIRE GROUNDED


#### Features:

- Sleek Plus T5 fluorescent fixtures feature an adjustable light shield that provides 360° rotation to direct light where necessary.
- Suitable for Low Voltage applications.
- Fixtures are furnished with replaceable lamps; tight-fit direct connectors; stainless steel mounting clips for horizontal or vertical mount; and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with silver or white enamel painted finish.
- The fixture features a built-in instant start, no flickering, silent Electronic Ballast rated AC 24V 50-60Hz.
- The ribbed acrylic diffuser lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable, max 70 watts.
- Compatible with 3-WIRE COMPONENTS on page???.









Model	Dimension	Max Watt	Lumens*	Finish
SG5ALV-14	22-7/8"L x 7/8"W x 1-7/8"H	14W	1350	S - Silver, W - White
SG5ALV-21	34-5/8"L x 7/8"W x 1-7/8"H	21W	2150	S - Silver, W - White
SG5ALV-28	46-1/4"L x 7/8"W x 1-3/4"H	28W	2900	S - Silver, W - White

Lamp Options				
30	3000K	ВК	Black	
35	3500K	BU	Blue	
41	4100K	GN	Green	
50	5000K	RD	Red	
64	6400K			

Ordering Instructions

Model Optional Switch - Add "SW" / Lamp Type \_ Finish

Example:

SG5ALV-14SW/30-W (With Rocker Switch) SG5ALV-14/30-W (Without Rocker Switch)

\*The information on LUMENS is based on cool white lamps.


NATURALLIGHTING.COM
www.naturallighting.com
888.900.6830
email: sales@naturallighting.com
FAX: 281.559.4949

- Sleek Plus T5 Corner Light Fluorescent fixtures are furnished with replaceable lamps, tight-fit direct connectors, metal mounting clips and ribbed acrylic lamp covers.
- The housing is made of extruded aluminum, with white enamel painted finish.
- The fixture features a built-in instant start, no flickering, silent Electronic Ballast rated AC120V 50-60Hz.
- The ribbed acrylic lamp cover fits securely on the housing of the fixture with no light leaks, warping or deformed lens.
- The fixture includes a removable specular aluminum reflector strip for precise directed lighting.
- The T5 lamps (included with fixtures) are energy efficient, long life with a 20,000 hours rating.
- Additional power supply cables, connecting cables, hardwire boxes and replacement lamps sold separately.
- Sleek Plus are linkable up to 10 units, max 350 watts.
- Compatible with 3-WIRE GROUNDED COMPONENTS on page???.










Model	Dimension	Max Watt	Lumens*	Finish
SG5CL-6	10-3/4"L x 2"W x 1-5/8"H	6W	480	W - White
SG5CL-8	13-3/4"L x 2"W x 1-5/8"H	8W	600	W - White
SG5CL-14	24"L x 2"W x 1-5/8"H	14W	1350	W - White
SG5CL-21	35-3/4"L x 2"W x 1-5/8"H	21W	2150	W - White
SG5CL-28	47-5/8"L x 2"W x 1-5/8"H	28W	2900	W - White
SG5CL-35	59-3/8"L x 2"W x 1-5/8"H	35W	3650	W - White







\*The information on LUMENS is based on cool white lamps.

NATURALLIGHTING.COM www.naturallighting.com 888.900.6830 email: sales@naturallighting.com FAX: 281.559.4949